

Hanwha Techwin

SNMP MIB Guide

V1.0

2018-04-05

Copyright

© 2018 Hanwha Techwin Co., Ltd. All rights reserved.

Restriction

Do not copy, distribute, or reproduce any part of this document without written approval from Hanwha Techwin Co., Ltd.

Disclaimer

Hanwha Techwin Co., Ltd. has made every effort to ensure the completeness and accuracy of this document, but makes no guarantees regarding the information contained herein. All responsibility for proper and safe use of the information in this document lies with users. Hanwha Techwin Co., Ltd. may revise or update this document without prior notice.

Contact Information

Hanwha Techwin Co., Ltd.

Hanwha Techwin R&D Center, 6, Pangyo-ro 319 beon-gil,
Bundang-gu, Seongnam-si, Gyeonggi-do, Korea

www.hanwha-security.com

Hanwha Techwin America

500 Frank W.Burr Blvd. Suite 32 Teaneck, NJ 07666

www.hanwhasecurity.com

Hanwha Techwin Europe

Heriot House, Heriot Road, Chertsey, Surrey, KT16 9DT. UK

www.hanwha-security.eu

Hanwha Techwin Shanghai

No.11 Weiliu Rd., Micro-electronic Industrial Park, Jingang
Road Tianjin 300385, China


www.hanwha-security.cn

Table of Contents

MIB Hierarchy	3
DVR MIB Hierarchy and Object IDs.....	4
Camera MIB Hierarchy and Object IDs.....	6
NVR MIB Hierarchy and Object IDs	13
Encoder MIB Hierarchy and Object IDs.....	15
Traps	20
SNMP Commands	21
Examples of commands for each SNMP versions	21
Examples of SNMP queries and results	23
SNMP Query.....	23
SNMP Result.....	25
SNMP Test	28
snmpwalk Command.....	28
snmpget Command.....	28
snmpset Command.....	29

MIB Hierarchy

OID (Object ID) provided by Hanwha Techwin is as follows. "Hanwha Techwin (htw, 36849)" is located under "enterprise (1)", and "Security Division (securitySolution, 1)" under Hanwha Techwin is assigned as "1". Under the Security Division, there are product families classified. In the product families, network camera (nwCam, 2) and encoder (encoder, 4) have a model based specific OID. Refer to 'SNMP Product ID (HTW_SNMP_Product_ID_en.pdf)' document for more details.

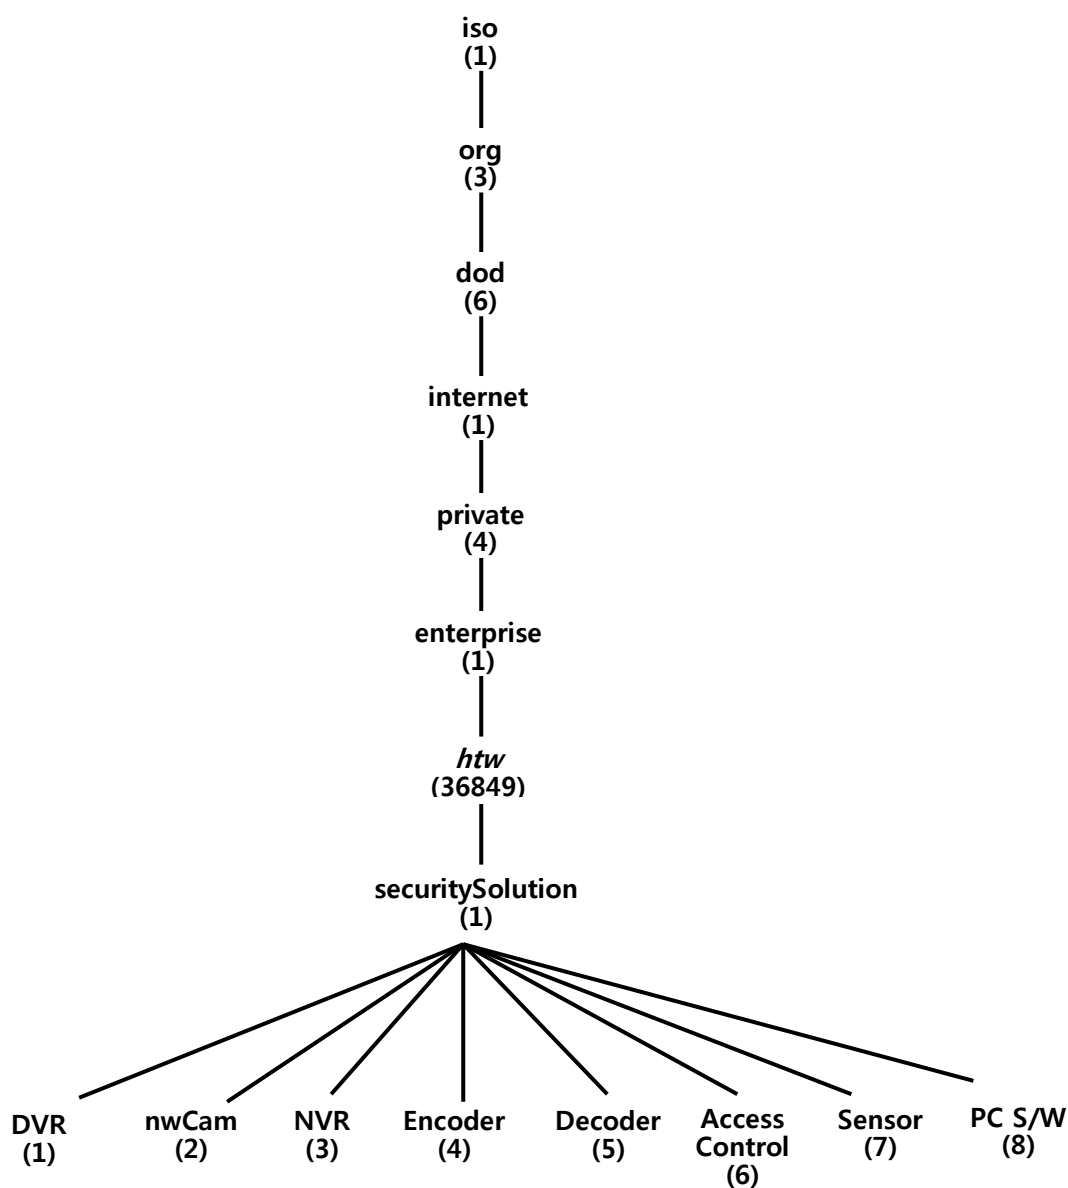

The MIB hierarchy and object IDs for product families (ProductFamily) are as follows:

DVR MIB Hierarchy and Object IDs

MIB Hierarchy				Object Name	Value	Read/ Write
10	11	12	13			
1				ModelName	"SRD-1670"	RO
2				SystemInfo		
	1			SystemSubInfo		
		1		FwVersionInfo	"v1.xx_XXXXXXXXXXXX"	RO
		2		DateTimeInfo	"yyyy-mm-dd hh-mm-ss"	RO
		3		TimeZoneInfo	"GMT+hh:mm"	RO
		4		DSTInfo	"mm:ww:dd:hh to mm:ww:dd:hh"	RO
		5		RebootInfo	0 or 1	RW
		6		FactoryResetInfo	0 or 1	RO
		7		SnmpVersion	"V1.0"	RO
	2			AVInfo		
		1		VideoType	"NTSC" or "PAL"	RO
		2		AudioType	"PCM"	RO
	3			netInfo		
		1		net1		
			1	NetMacInfo	"XX:XX:XX:XX:XX:XX"	RO
			2	NetIPInfo	"xxx.xxx.xxx.xxx"	RO
			3	GWInfo	"xxx.xxx.xxx.xxx"	RO
			4	MaskInfo	"xxx.xxx.xxx.xxx"	RO
			5	DNSInfo	"xxx.xxx.xxx.xxx"	RO
3				SystemNotification		
	1			PowerNotifcation		
		1		ColdPowerOnDate	"yyyy-mm-dd hh-mm-ss"	RO
		2		WarmPowerOnDate	"yyyy-mm-dd hh-mm-ss"	RO
		3		ShutDownDate	"yyyy-mm-dd hh-mm-ss"	RO
		4		AbnormalStartDate	"yyyy-mm-dd hh-mm-ss"	RO
	2			VideoStatus		
		1		Ch1VideoStatus	"On" or "Vloss" or "Disable" or "NotSupported"	RO
		2		Ch2VideoStatus	"On" or "Vloss" or "Disable" or "NotSupported"	RO
		3		Ch3VideoStatus	"On" or "Vloss" or "Disable" or "NotSupported"	RO

				"NotSupported"	
		4	Ch4VideoStatus	"On" or "Vloss" or "Disable" or "NotSupported"	RO
		16	Ch16VideoStatus	"On" or "Vloss" or "Disable" or "NotSupported"	RO
	3		OtherStatus		
		1	RecordStatus	"On" or "Off" or "Fail"	RO
		2	FanStatus	"OK" or "Fail"	RO
		3	BatteryStatus	"OK" or "Fail"	RO
		4	BeepStatus	"On" or "Off"	RO
4			EventStatus		
	1		AlarmInput		
		1	AlarmInput1		
		1	AlarmInputStatus1	"Open" or "Close" or "Disable" or "NotSupported"	RO
		2	AlarmInput2		
		1	AlarmInputStatus2	"Open" or "Close" or "Disable" or "NotSupported"	RO
		16	AlarmInput16		
		1	AlarmInputStatus16	"Open" or "Close" or "Disable" or "NotSupported"	RO
	2		AlarmOutput		
		1	AlarmOutput1		
		1	AlarmOutputStatus1	"On" or "Off" or "Disable" or "NotSupported"	RO
		2	AlarmOutput2		
		1	AlarmOutputStatus2	"On" or "Off" or "Disable" or "NotSupported"	RO
		16	AlarmOutput16		
		1	AlarmOutputStatus16	"On" or "Off" or "Disable" or "NotSupported"	RO
	3		MotionDetection		
		1	MotionDetection1		
		1	MotionDetectionStatus1	"On" or "Off" or "Disable" or "NotSupported"	RO
		2	MotionDetection2		
		1	MotionDetectionStatus2	"On" or "Off" or "Disable" or "NotSupported"	RO
		16	MotionDetection16		
		1	MotionDetectionStatus16	"On" or "Off" or "Disable" or "NotSupported"	RO

4			TamperingDetection		
	1		TamperingDetection1		
		1	TamperingDetectionStatus1	"On" or "Off" or "Disable" or "NotSupported"	RO
	2		TamepringDetection2		
		1	TamepringDetectionStatus2	"On" or "Off" or "Disable" or "NotSupported"	RO
	16		TamepringDetection16		
		1	TamepringDetectionStatus16	"On" or "Off" or "Disable" or "NotSupported"	RO
5			HDDStatus		
	1		HDD1Status		
		1	HDD1Check	"Not Installed" or "Installed"	RO
		2	HDD1TotalSize	"xxxGB"	RO
		3	HDD1FullStatus	"Not Full" or "Full"	RO
		4	HDD1FailStatus	"Normal" or "Fail"	RO
	2		HDD2Status		
		1	HDD2Check	"Not Installed" or "Installed"	RO
		2	HDD2TotalSize	"xxxGB"	RO
		2	HDD2FullStatus	"Not Full" or "Full"	RO
		3	HDD2FailStatus	"Normal" or "Fail"	RO
	8		HDD8Status		
		1	HDD8Check	"Not Installed" or "Installed"	RO
		2	HDD8TotalSize	"xxxGB"	RO
		2	HDD8FullStatus	"Not Full" or "Full"	RO
		3	HDD8FailStatus	"Normal" or "Fail"	RO

Camera MIB Hierarchy and Object IDs

The "Low" or "High" DetectionStatus item outputs "High" when a corresponding event occurs, and "Low" when the event does not occur.

Network camera has specific model based OIDs. For product code numbers of the network camera, refer to 'SNMP Product ID (HTW_SNMP_Product_ID_en.pdf)' document.

MIB Hierarchy					Object Name	Value	Read/Write
10	11	12	13	14			
1					snb1001		RO
	1				modelName	SNB-1001	RO

2			systemInfo		
	1		systemSubInfo		
		1	fwVersion	ex) "v1.00_110731"	RO
		2	datetime	"yy-mm-dd hh:mm:ss"	RW
		3	reboot	"OK"	RW
		4	factoryReset	"Soft" or "Hard"	RW
	2		avInfo		
		1	videoType	"NTSC" or "PAL"	RW
	3		netInfo		
		1	mac	ex) "00:09:18:30:0F:E0"	RO
		2	ip	ex) "192.168.1.100"	RW
		3	gw	ex) "192.168.1.1"	RW
		4	mask	ex) "255.255.255.0"	RW
3			eventStatus		
	1		alarmInput		
		1	alarmInput1		
			1 alarmInputStatus1	"Low" or "High"	RO
			2 alarmInputDate1	"yy-mm-dd hh:mm:ss"	RO
		2	alarmInput2		
			1 alarmInputStatus2	"Low" or "High"	RO
			2 alarmInputDate2	"yy-mm-dd hh:mm:ss"	RO
		3	alarmInput3		
			1 alarmInputStatus3	"Low" or "High"	RO
			2 alarmInputDate3	"yy-mm-dd hh:mm:ss"	RO
		4	alarmInput4		
			1 alarmInputStatus4	"Low" or "High"	RO
			2 alarmInputDate4	"yy-mm-dd hh:mm:ss"	RO
	2		relayOutput		
		1	relayOutput1		
			1 relayOutputStatus1	"Low" or "High"	RW
			2 relayOutputDate1	"yy-mm-dd hh:mm:ss"	RW
		2	relayOutput2		
			1 relayOutputStatus2	"Low" or "High"	RW
			2 relayOutputDate2	"yy-mm-dd hh:mm:ss"	RW
		3	relayOutput3		

		1	relayOutputStatus3	"Low" or "High"	RW
		2	relayOutputDate3	"yy-mm-dd hh:mm:ss"	RW
	4		relayOutput4		
		1	relayOutputStatus4	"Low" or "High"	RW
		2	relayOutputDate4	"yy-mm-dd hh:mm:ss"	RW
	3		motionDetection		
		1	motionDetectionStatus	"Low" or "High"	RO
		2	motionDetectionDate	"yy-mm-dd hh:mm:ss"	RO
	4		videoAnalytics		
		1	videoAnalyticsStatus	"Low" or "High"	RO
		2	videoAnalyticsDate	"yy-mm-dd hh:mm:ss"	RO
	5		faceDetection		
		1	faceDetectionStatus	"Low" or "High"	RO
		2	faceDetectionDate	"yy-mm-dd hh:mm:ss"	RO
	6		networkDisconnection		
		1	networkDisconnectionStatus	"Low" or "High"	RO
		2	networkDisconnectionDate	"yy-mm-dd hh:mm:ss"	RO
	7		tampering		
		1	tamperingStatus	"Low" or "High"	RO
		2	tamperingDate	"yy-mm-dd hh:mm:ss"	RO
	8		audioDetection		
		1	audioDetectionStatus	"Low" or "High"	RO
		2	audioDetectionDate	"yy-mm-dd hh:mm:ss"	RO
	9		auxOutput		
		1	auxStatus1	Write: "ON" or "OFF" Read: "Low" or "High"	RW
		2	auxDate1	"yy-mm-dd hh:mm:ss"	RO
	10		defocus		
		1	defocusStatus	"Low" or "High"	RO
		2	defocusDate	"yy-mm-dd hh:mm:ss"	RO
	11		fogDetection		
		1	fogDetectionStatus	"Low" or "High"	RO
		2	fogDetectionDate	"yy-mm-dd hh:mm:ss"	RO
	12		soundClassification		

		1	soundClassificationStatus	"Low" or "High"	RO
		2	soundClassificationDate	"yy-mm-dd hh:mm:ss"	RO
	13		shockDetection		
		1	shockDetectionStatus	"Low" or "High"	RO
		2	shockDetectionDate	"yy-mm-dd hh:mm:ss"	RO
	14		temperatureDetection		
		1	temperatureDetectionStatus	"Low" or "High"	RO
		2	temperatureDetectionDate	"yy-mm-dd hh:mm:ss"	RO
4			sdStatus		
		1	sdCheck	"Not Install" or "Install"	RO
		2	sdFullStatus	"Not Full" or "Full"	RO
		3	sdFailStatus	"Normal" or "Fail"	RO
		4	sdFormat	"OK"	RW

The MIB of multi-directional camera is shown below.

MIB Hierarchy					Object Name	Value	Read/Write
10	11	12	13	14			
1					MDC		RO
	1				ModelName	PNM-9080VQ	RO
	2				SystemInfo		
		1			SystemSubInfo		
			1		FwVersionInfo	ex)"v1.00_110731"	RO
			2		DateTimeInfo	"yyyy-mm-dd hh:mm:ss"	RW
			3		Reboot	"OK"	WO
			4		FactoryReset	"Soft" or "Hard"	WO
	2				AVInfo		
		1			VideoType	"NTSC" or "PAL"	RW
	3				NetInfo		
			1		MACAddress	ex) "00:09:18:30:0F:E0"	RO
			2		IPAddress	ex) "192.168.1.100"	RW
			3		Gateway	ex) "192.168.1.1"	RW
			4		SubnetMask	ex) "255.255.255.0"	RW
	3				EventStatus		
		1			AlarmInput		
			1		AlarmInput01		

		1	AlarmInputStatus01	"Low" or "High"	RO
		2	AlarmInputDate01	"yyyy-mm-dd hh:mm:ss"	RO
	2		AlarmOutput		
		1	AlarmOutput01		
		1	AlarmOutputStatus01	"Low" or "High"	RW
		2	AlarmOutputDate01	"yyyy-mm-dd hh:mm:ss"	RO
	3		MotionDetection		
		1	MotionDetectionAtCH01		
		1	MotionDetectionStatusAtCH01	"Low" or "High"	RO
		2	MotionDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	MotionDetectionAtCH02		
		1	MotionDetectionStatusAtCH02	"Low" or "High"	RO
		2	MotionDetectionDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	MotionDetectionAtCH03		
		1	MotionDetectionStatusAtCH03	"Low" or "High"	RO
		2	MotionDetectionDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	MotionDetectionAtCH04		
		1	MotionDetectionStatusAtCH04	"Low" or "High"	RO
		2	MotionDetectionDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	4		VideoAnalytics		
		1	VideoAnalyticsAtCH01		
		1	VideoAnalyticsStatusAtCH01	"Low" or "High"	RO
		2	VideoAnalyticsDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	VideoAnalyticsAtCH02		
		1	VideoAnalyticsStatusAtCH02	"Low" or "High"	RO
		2	VideoAnalyticsDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	VideoAnalyticsAtCH03		
		1	VideoAnalyticsStatusAtCH03	"Low" or "High"	RO
		2	VideoAnalyticsDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	VideoAnalyticsAtCH04		
		1	VideoAnalyticsStatusAtCH04	"Low" or "High"	RO
		2	VideoAnalyticsDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	5		FaceDetection		
		1	FaceDetectionAtCH01		
		1	FaceDetectionStatusAtCH01	"Low" or "High"	RO

		2	FaceDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	FaceDetectionAtCH02		
		1	FaceDetectionStatusAtCH02	"Low" or "High"	RO
		2	FaceDetectionDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	FaceDetectionAtCH03		
		1	FaceDetectionStatusAtCH03	"Low" or "High"	RO
		2	FaceDetectionDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	FaceDetectionAtCH04		
		1	FaceDetectionStatusAtCH04	"Low" or "High"	RO
		2	FaceDetectionDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	6		TamperingDetection		
		1	TamperingDetectionAtCH01		
			TamperingDetectionStatusAtCH01	"Low" or "High"	RO
			TamperingDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	TamperingDetectionAtCH02		
			TamperingDetectionStatusAtCH02	"Low" or "High"	RO
			TamperingDetectionDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	TamperingDetectionAtCH03		
			TamperingDetectionStatusAtCH03	"Low" or "High"	RO
			TamperingDetectionDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	TamperingDetectionAtCH04		
			TamperingDetectionStatusAtCH04	"Low" or "High"	RO
			TamperingDetectionDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	7		DefocusDetection		
		1	DefocusDetectionAtCH01		
		1	DefocusDetectionStatusAtCH01	"Low" or "High"	RO
		2	DefocusDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	DefocusDetectionAtCH02		
		1	DefocusDetectionStatusAtCH02	"Low" or "High"	RO
		2	DefocusDetectionDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	DefocusDetectionAtCH03		
		1	DefocusDetectionStatusAtCH03	"Low" or "High"	RO
		2	DefocusDetectionDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	DefocusDetectionAtCH04		

		1	DefocusDetectionStatusAtCH04	"Low" or "High"	RO
		2	DefocusDetectionDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	8		FogDetection		
		1	FogDetectionAtCH01		
		1	FogDetectionStatusAtCH01	"Low" or "High"	RO
		2	FogDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	FogDetectionAtCH02		
		1	FogDetectionStatusAtCH02	"Low" or "High"	RO
		2	FogDetectionDateAtCH02	"yyyy-mm-dd hh:mm:ss"	RO
		3	FogDetectionAtCH03		
		1	FogDetectionStatusAtCH03	"Low" or "High"	RO
		2	FogDetectionDateAtCH03	"yyyy-mm-dd hh:mm:ss"	RO
		4	FogDetectionAtCH04		
		1	FogDetectionStatusAtCH04	"Low" or "High"	RO
		2	FogDetectionDateAtCH04	"yyyy-mm-dd hh:mm:ss"	RO
	4		SDCard		
		1	SDCard01		
		1	SDCardCheck01	"Not Install" or "Install"	RO
		2	SDCardFormat01	"Ok"	WO
		3	SDCardFullStatus01	"Not Full" or "Full"	RO
		4	SDCardFailStatus01	"Normal" or "Fail"	RO
		2	SDCard02		
		1	SDCardCheck02	"Not Install" or "Install"	RO
		2	SDCardFormat02	"Ok"	WO
		3	SDCardFullStatus02	"Not Full" or "Full"	RO
		4	SDCardFailStatus02	"Normal" or "Fail"	RO
		3	SDCard03		
		1	SDCardCheck03	"Not Install" or "Install"	RO
		2	SDCardFormat03	"Ok"	WO
		3	SDCardFullStatus03	"Not Full" or "Full"	RO
		4	SDCardFailStatus03	"Normal" or "Fail"	RO
		4	SDCard04		
		1	SDCardCheck04	"Not Install" or "Install"	RO
		2	SDCardFormat04	"Ok"	WO
		3	SDCardFullStatus04	"Not Full" or "Full"	RO
		4	SDCardFailStatus04	"Normal" or "Fail"	RO

NVR MIB Hierarchy and Object IDs

MIB Hierarchy			Object Name	Value	Read/Write
1			modelName	"SRN-4000"	RO
2			systemInfo		
	1		systemSubInfo		
		1	fwVersionInfo	"v1.xx_XXXXXXXXXXXX"	RO
		2	dateTimeInfo	"yyyy-mm-dd hh-mm-ss"	RW
		3	timeZoneInfo	"GMT+hh:mm"	RW
		4	DSTInfo	"MxxWxxDxxHxx-MxxWxxDxxHxx"	RW
		5	reboot	"Ok" or "No"	RW
		6	factoryReset	"Ok" or "No"	RW
		7	snmpVersion	"v1.x"	RO
	2		avInfo		
		1	videoType	"NOT SUPPORTED"	RO
		2	audioType	"NOT SUPPORTED"	RO
	3		netInfo		
		1	net1		
			1 mac	xx:xx:xx:xx:xx:xx	RO
			2 ip	xx.xx.xx.xx	RW
			3 gw	xx.xx.xx.xx	RW
			4 mask	xx.xx.xx.xx	RW
			5 dns	xx.xx.xx.xx	RW
		4	net4		
			1 mac	xx:xx:xx:xx:xx:xx	RO
			2 ip	xx.xx.xx.xx	RW
			3 gw	xx.xx.xx.xx	RW
			4 mask	xx.xx.xx.xx	RW
			5 dns	xx.xx.xx.xx	RW
3			systemNotification		
	1		powerNotifcation		
		1	coldPowerOnDate	"yyyy-mm-dd hh-mm-ss"	RO
		2	warmPowerOnDate	"yyyy-mm-dd hh-mm-ss"	RO
		3	shutDownDate	"yyyy-mm-dd hh-mm-ss"	RO
		4	abnomalStartDate	"yyyy-mm-dd hh-mm-ss"	RO

2		videoStatus		
	1	ch1VideoStatus	ON, VLOSS, DISABLE, NOT SUPPORTED, NOT-REGISTERED	RO
	2	ch2VideoStatus	ON, VLOSS, DISABLE, NOT SUPPORTED, NOT-REGISTERED	RO
	3	ch3VideoStatus	ON, VLOSS, DISABLE, NOT SUPPORTED, NOT-REGISTERED	RO
	4	ch4VideoStatus	ON, VLOSS, DISABLE, NOT SUPPORTED, NOT-REGISTERED	RO
	64	ch64VideoStatus	ON, VLOSS, DISABLE, NOT SUPPORTED, NOT-REGISTERED	RO
3		otherStatus		
	1	recordStatus	ON, OFF, FAIL	RO
	2	fanStatus	OK, FAIL	RO
	3	batteryStatus	OK, FAIL	RO
	4	beepStatus	ON, OFF	RO
4		eventStatus		
	1	alarmInput		
	1	alarmInput1		
	1	alarmInputStatus1	CLOSE, OPEN, DISABLE, NOT SUPPORTED	RO
	2	alarmInput2		
	1	alarmInputStatus2	CLOSE, OPEN, DISABLE, NOT SUPPORTED	RO
	8	alarmInput8		
	1	alarmInputStatus8	CLOSE, OPEN, DISABLE, NOT SUPPORTED	RO
	2	alarmOutput		
	1	alarmOutput1		
	1	alarmOutputStatus1	OFF, ON, DISABLE, NOT SUPPORTED	RW
	2	alarmOutput2		
	1	alarmOutputStatus2	OFF, ON, DISABLE, NOT SUPPORTED	RW
	4	alarmOutput4		
	1	alarmOutputStatus4	OFF, ON, DISABLE, NOT SUPPORTED	RW
	3	motionDetection		
	1	motionDetection1		
	1	motionDetectionStatus1	OFF, ON, DISABLE, NOT SUPPORTED	RO
	2	motionDetection2		
	1	motionDetectionStatus2	OFF, ON, DISABLE, NOT SUPPORTED	RO

		64	motionDetection64		
		1	motionDetectionStatus64	OFF, ON, DISABLE, NOT SUPPORTED	RO
5			HDDStatus		
	1		HDD1Status		
		1	HDD1Check	NOT INSTALLED, INSTALLED	RO
		2	HDD1TotalSize	"xxxGB"	RO
		3	HDD1FullStatus	NOT FULL, FULL, UNDER-RAID	RO
		4	HDD1FailStatus	NORMAL, FAIL, UNDER-RAID	RO
	2		HDD2Status		
		1	HDD2Check	NOT INSTALLED, INSTALLED	RO
		2	HDD2TotalSize	"xxxGB"	RO
		2	HDD2FullStatus	NOT FULL, FULL, UNDER-RAID	RO
		3	HDD2FailStatus	NORMAL, FAIL, UNDER-RAID	RO
	12		HDD12Status		
		1	HDD12Check	NOT INSTALLED, INSTALLED	RO
		2	HDD12TotalSize	"xxxGB"	RO
		2	HDD12FullStatus	NOT FULL, FULL, UNDER-RAID	RO
		3	HDD12FailStatus	NORMAL, FAIL, UNDER-RAID	RO

Encoder MIB Hierarchy and Object IDs

For product code numbers of the encoders, refer to 'SNMP Product ID (HTW_SNMP_Product_ID_en.pdf)' document.

MIB Hierarchy					Object Name	Value	Read/Write
10	11	12	13	14			
1					SPE		RO
	1				ModelName	ex) "SPE-100"	RO
	2				SystemInfo		
		1			SystemSubInfo		
			1		FwVersionInfo	ex)"v1.00_110731"	RO
			2		DateTimeInfo	"yyyy-mm-dd hh:mm:ss"	RW
			3		Reboot	"OK"	WO
			4		FactoryReset	"Soft" or "Hard"	WO

	2		AVInfo		
		1	VideoType	"NTSC" or "PAL"	RW
	3		NetInfo		
		1	MACAddress	ex) "00:09:18:30:0F:E0"	RO
		2	IPAddress	ex) "192.168.1.100"	RW
		3	Gateway	ex) "192.168.1.1"	RW
		4	SubnetMask	ex) "255.255.255.0"	RW
	3		EventStatus		
	1		AlarmInput		
		1	AlarmInput01		
		1	AlarmInputStatus01	"Low" or "High"	RO
		2	AlarmInputDate01	"yyyy-mm-dd hh:mm:ss"	RO
		2	AlarmInput02		
		1	AlarmInputStatus02	"Low" or "High"	RO
		2	AlarmInputDate02	"yyyy-mm-dd hh:mm:ss"	RO
		16	AlarmInput16		
		1	AlarmInputStatus16	"Low" or "High"	RO
		2	AlarmInputDate16	"yyyy-mm-dd hh:mm:ss"	RO
	2		AlarmOutput		
		1	AlarmOutput01		
		1	AlarmOutputStatus01	"Low" or "High"	RW
		2	AlarmOutputDate01	"yyyy-mm-dd hh:mm:ss"	RO
		2	AlarmOutput02		
		1	AlarmOutputStatus02	"Low" or "High"	RW
		2	AlarmOutputDate02	"yyyy-mm-dd hh:mm:ss"	RO
		3	AlarmOutput03		
		1	AlarmOutputStatus03	"Low" or "High"	RW
		2	AlarmOutputDate03	"yyyy-mm-dd hh:mm:ss"	RO
		4	AlarmOutput04		
		1	AlarmOutputStatus04	"Low" or "High"	RW
		2	AlarmOutputDate04	"yyyy-mm-dd hh:mm:ss"	RO
	3		MotionDetection		
		1	MotionDetectionAtCH01		
		1	MotionDetectionStatusAtCH01	"Low" or "High"	RO
		2	MotionDetectionDateAtCH01	"yyyy-mm-dd hh:mm:ss"	RO
		2	MotionDetectionAtCH02		

		1	MotionDetectionStatusAtCH02	“Low” or “High”	RO
		2	MotionDetectionDateAtCH02	“yyyy-mm-dd hh:mm:ss”	RO
	16		MotionDetectionAtCH16		
		1	MotionDetectionStatusAtCH16	“Low” or “High”	RO
		2	MotionDetectionDateAtCH16	“yyyy-mm-dd hh:mm:ss”	RO
	4		VideoAnalytics		
		1	VideoAnalyticsAtCH01		
		1	VideoAnalyticsStatusAtCH01	“Low” or “High”	RO
		2	VideoAnalyticsDateAtCH01	“yyyy-mm-dd hh:mm:ss”	RO
		2	VideoAnalyticsAtCH02		
		1	VideoAnalyticsStatusAtCH02	“Low” or “High”	RO
		2	VideoAnalyticsDateAtCH02	“yyyy-mm-dd hh:mm:ss”	RO
		16	VideoAnalyticsAtCH16		
		1	VideoAnalyticsStatusAtCH16	“Low” or “High”	RO
		2	VideoAnalyticsDateAtCH16	“yyyy-mm-dd hh:mm:ss”	RO
	5		FaceDetection		
		1	FaceDetectionAtCH01		
		1	FaceDetectionStatusAtCH01	“Low” or “High”	RO
		2	FaceDetectionDateAtCH01	“yyyy-mm-dd hh:mm:ss”	RO
		2	FaceDetectionAtCH02		
		1	FaceDetectionStatusAtCH02	“Low” or “High”	RO
		2	FaceDetectionDateAtCH02	“yyyy-mm-dd hh:mm:ss”	RO
		16	FaceDetectionAtCH16		
		1	FaceDetectionStatusAtCH16	“Low” or “High”	RO
		2	FaceDetectionDateAtCH16	“yyyy-mm-dd hh:mm:ss”	RO
	6		TamperingDetection		
		1	TamperingDetectionAtCH01		
			TamperingDetectionStatusAtCH01	“Low” or “High”	RO
			TamperingDetectionDateAtCH01	“yyyy-mm-dd hh:mm:ss”	RO
		2	TamperingDetectionAtCH02		
			TamperingDetectionStatusAtCH02	“Low” or “High”	RO
			TamperingDetectionDateAtCH02	“yyyy-mm-dd hh:mm:ss”	RO
		16	TamperingDetectionAtCH16		
			TamperingDetectionStatusAtCH16	“Low” or “High”	RO
			TamperingDetectionDateAtCH16	“yyyy-mm-dd hh:mm:ss”	RO

7		DefocusDetection		
	1	DefocusDetectionAtCH01		
		1	DefocusDetectionStatusAtCH01	“Low” or “High” RO
		2	DefocusDetectionDateAtCH01	“yyyy-mm-dd hh:mm:ss” RO
	2	DefocusDetectionAtCH02		
		1	DefocusDetectionStatusAtCH02	“Low” or “High” RO
		2	DefocusDetectionDateAtCH02	“yyyy-mm-dd hh:mm:ss” RO
	16	DefocusDetectionAtCH16		
		1	DefocusDetectionStatusAtCH16	“Low” or “High” RO
		2	DefocusDetectionDateAtCH16	“yyyy-mm-dd hh:mm:ss” RO
8		FogDetection		
	1	FogDetectionAtCH01		
		1	FogDetectionStatusAtCH01	“Low” or “High” RO
		2	FogDetectionDateAtCH01	“yyyy-mm-dd hh:mm:ss” RO
	2	FogDetectionAtCH02		
		1	FogDetectionStatusAtCH02	“Low” or “High” RO
		2	FogDetectionDateAtCH02	“yyyy-mm-dd hh:mm:ss” RO
	16	FogDetectionAtCH16		
		1	FogDetectionStatusAtCH16	“Low” or “High” RO
		2	FogDetectionDateAtCH16	“yyyy-mm-dd hh:mm:ss” RO
4		SDCard		
	1	SDCard01		
		1	SDCardCheck01	“Not Install” or “Install” RO
		2	SDCardFormat01	“Ok” WO
		3	SDCardFullStatus01	“Not Full” or “Full” RO
		4	SDCardFailStatus01	“Normal” or “Fail” RO
	2	SDCard02		
		1	SDCardCheck02	“Not Install” or “Install” RO
		2	SDCardFormat02	“Ok” WO
		3	SDCardFullStatus02	“Not Full” or “Full” RO
		4	SDCardFailStatus02	“Normal” or “Fail” RO
	16	SDCard16		
		1	SDCardCheck16	“Not Install” or “Install” RO
		2	SDCardFormat16	“Ok” WO
		3	SDCardFullStatus16	“Not Full” or “Full” RO

			4		SDCardFailStatus16	"Normal" or "Fail"	RO
--	--	--	---	--	--------------------	--------------------	----

Traps

SNMP traps enable a video product to notify the management station of significant events by way of an unsolicited SNMP message.

DVR and NVR support the SNMP generic trap types: coldStart, warmStart, linkDown, linkUp, authenticationFailure. Unlike record products, network camera supports the SNMP generic trap types: coldStart, warmStart, linkUp and authenticationFailure; linkDown is excluded.

The SNMP generic trap types are described below.

- coldStart: a coldStart trap signifies that the sending protocol entity is reinitializing itself so that the agent's configuration or the protocol entity implementation can be altered.
- warmStart: a warmStart trap signifies that the sending protocol entity is reinitializing itself so that neither the agent configuration nor the protocol entity implementation can be altered.
- linkDown: a linkDown trap signifies that the sending protocol entity recognizes a failure in one of the communication links represented in the agent's configuration.
- linkUp: a linkUp trap signifies that the sending protocol entity recognizes that one of the communication links represented in the agent's configuration has come up.
- authenticationFailure: an authenticationFailure trap signifies that the sending protocol entity is the addressee of a protocol message that is not properly authenticated.

SNMP Commands

SNMP commands used by Hanwha Techwin are as follows.

- snmpget: A command to fetch only data of a corresponding OID
ex) snmpget -v [version] -c public [ip address] [OID value]
- snmpwalk: A command to fetch all data of subtrees at once
ex) snmpwalk -v [version] -c public [ip address] [OID value]
- snmpset : A command to set data values of a corresponding OID
ex) snmpset -v [version] -c public [ip address] [OID value] [OID value Type]

Examples of commands for each SNMP versions

- SNMP version 1, 2c
 - ex1) snmpwalk -v 1 -c public 192.168.1.100 system
 - ex2) snmpwalk -v 2c -c public 192.168.1.100 system
 - ex3) snmpset -v 2c -c write 192.168.1.100 enterprises.36849.1.2.1.2.1.2.3.0 s
"OK"
- Option description
 - v: snmp version to use (1 | 2c | 3)
 - c: set the community string
- Types of OID values
 - i INTEGER
 - u UNSIGNED
 - s STRING
 - x HEX STRING
 - d DECIMAL STRING
 - n NULLOBJ
 - o OBJID
 - t TIMETICKS
 - a IPADDRESS
 - b BITS

- SNMP version 3
 - snmpwalk(snmpget) -v 3 -u [name] -l [level] -a [auth protocol] -A [password]
[ip address] [OID value]
 - ex1) snmpwalk -v 3 -u admin -l authNoPriv -a MD5 -A admin 192.168.1.100
system
 - ex2) snmpset -v 3 -u admin -l authNoPriv -a MD5 -A admin 192.168.1.100
enterprises.36849.1.2.1.2.1.2.3.0 s "OK"
- Option description
 - u: security name
 - l: security level (noAuthNoPriv | authNoPriv | authPriv)
 - A: authentication protocol pass phrase.
 - a: authentication protocol (MD5 | SHA)

Examples of SNMP queries and results

SNMP Query

An example of a query statement for receiving SNMP results

```
#!/bin/sh
target_ip=192.168.1.100
echo
echo "#####"
echo $target_ip
echo "#####"
echo
echo "-----MIB Tree-----"
echo "iso.org.dod.intenet.private.enterprise (1.3.6.1.4.1)"
echo " ~.HanwhaTechwin.SecuritySolution.NWCAM.SNB1001 (~.36849.1.2.1)"
echo " ~.HanwhaTechwin.SecuritySolution.NWCAM.SND1011 (~.36849.1.2.2)"
echo " ~.HanwhaTechwin.SecuritySolution.NWCAM.SND1080 (~.36849.1.2.3)"
echo " ~.HanwhaTechwin.SecuritySolution.NWCAM.SNV1080 (~.36849.1.2.4)"
echo " ~.HanwhaTechwin.SecuritySolution.NWCAM.SNO1080R (~.36849.1.2.5)"
echo "-----"
echo
echo "-----System Information-----"
echo "[Product description, product ID, elapsed time since the boot, product name]"
snmpget -v 1 -c public $target_ip sysDescr.0
snmpget -v 1 -c public $target_ip sysObjectID.0
snmpget -v 1 -c public $target_ip sysUpTime.0
snmpget -v 1 -c public $target_ip sysName.0
echo
echo "-----Disk Information-----"
echo "[Total capacity of flash memory, used capacity, remaining capacity, usage ratio]"
snmpget -v 1 -c public $target_ip dskTotal.1
snmpget -v 1 -c public $target_ip dskAvail.1
snmpget -v 1 -c public $target_ip dskUsed.1
snmpget -v 1 -c public $target_ip dskPercent.1
echo
echo "-----Storage Information-----"
echo "[RAM memory size, size in use(integer * 1K = xxxKbytes)]"
snmpget -v 1 -c public $target_ip hrStorageDescr.1
snmpget -v 1 -c public $target_ip hrStorageSize.1
snmpget -v 1 -c public $target_ip hrStorageUsed.1
```

```

echo "[/ Size of directory, size in use (integer * 4K = xxxKbytes)]"
snmpget -v 1 -c public $target_ip hrStorageDescr.31
snmpget -v 1 -c public $target_ip hrStorageSize.31
snmpget -v 1 -c public $target_ip hrStorageUsed.31
echo "[/mnt/mmc(SD Card) Size of directory, size in use (integer * 4K =
xxxKbytes)]"
[SNB-6004, SNB-6003, SND-6084, SND-6083, SNO-6084R, SND-6084R, SNV-6084R, SNV-
6012M]
snmpget -v 1 -c public $target_ip hrStorageDescr.41
snmpget -v 1 -c public $target_ip hrStorageSize.41
snmpget -v 1 -c public $target_ip hrStorageUsed.41
[Other Models: Non-6004 series models]
snmpget -v 1 -c public $target_ip hrStorageDescr.36
snmpget -v 1 -c public $target_ip hrStorageSize.36
snmpget -v 1 -c public $target_ip hrStorageUsed.36
echo
echo "-----CPU Load Information-----"
echo "[1 minute average load, 5 minute average load, 15 minute average load]"
snmpget -v 1 -c public $target_ip laLoad.1
snmpget -v 1 -c public $target_ip laLoad.2
snmpget -v 1 -c public $target_ip laLoad.3
echo
echo "-----Network Interface Information-----"
echo "[Physical speed of the network, MAC address, input traffic (bytes), output
traffic(bytes)]"
snmpget -v 1 -c public $target_ip ifSpeed.1
snmpget -v 1 -c public $target_ip ifPhysAddress.1
snmpget -v 1 -c public $target_ip ifInOctets.1
snmpget -v 1 -c public $target_ip ifOutOctets.1
snmpget -v 1 -c public $target_ip ifName.1

snmpget -v 1 -c public $target_ip ifSpeed.2
snmpget -v 1 -c public $target_ip ifPhysAddress.2
snmpget -v 1 -c public $target_ip ifInOctets.2
snmpget -v 1 -c public $target_ip ifOutOctets.2
snmpget -v 1 -c public $target_ip ifName.2

snmpget -v 1 -c public $target_ip ifSpeed.3
snmpget -v 1 -c public $target_ip ifPhysAddress.3
snmpget -v 1 -c public $target_ip ifInOctets.3
snmpget -v 1 -c public $target_ip ifOutOctets.3
snmpget -v 1 -c public $target_ip ifName.3

snmpget -v 1 -c public $target_ip ifSpeed.4
snmpget -v 1 -c public $target_ip ifPhysAddress.4
snmpget -v 1 -c public $target_ip ifInOctets.4
snmpget -v 1 -c public $target_ip ifOutOctets.4

```



```

snmpget -v 1 -c public $target_ip ifName.4

echo
echo "-----Memory Information-----"
echo "[Total memory, remaining memory]"
snmpget -v 1 -c public $target_ip memTotalReal.0
snmpget -v 1 -c public $target_ip memAvailReal.0
echo
echo "-----Test End-----"
echo

```

SNMP Result

The SNMP result of network camera SNB-1001 is as follows.

SNB-1001 SNMP Output

```

#####
192.168.1.100
#####

```

The following are the results from MIB Tree.

```

-----MIB Tree-----
iso.org.dod.intenet.private.enterprise (1.3.6.1.4.1)
~.HanwhaTechwin.SecuritySolution.NWCAM.SNB1001 (~.36849.1.2.1)
~.HanwhaTechwin.SecuritySolution.NWCAM.SND1011 (~.36849.1.2.2)
~.HanwhaTechwin.SecuritySolution.NWCAM.SND1080 (~.36849.1.2.3)
~.HanwhaTechwin.SecuritySolution.NWCAM.SNV1080 (~.36849.1.2.4)
~.HanwhaTechwin.SecuritySolution.NWCAM.SNO1080R (~.36849.1.2.5)
-----

```

System Information is shown below. Product description, product ID, time elapsed after boot (0:10:54.49 10 minutes 54 seconds and 49) and product name are displayed.

```

-----System Information-----
SNMPv2-MIB::sysDescr.0 = STRING: Hanwha WiseNet IP Camera
SNMPv2-MIB::sysObjectID.0 = OID: SNMPv2-SMI::enterprises.36849.1.2.1
DISMAN-EVENT-MIB::sysUpTimeInstance = Timeticks: (65449) 0:10:54.49
SNMPv2-MIB::sysName.0 = STRING: SNB-1001

```

Disk Information is shown below. Total capacity of flash memory (about 678G), available capacity (about 63G), used capacity (about 579G) and usage ratio (90%) are displayed. The unit size of the block is 1KB(Kbytes).

```
-----Disk Information-----
UCD-SNMP-MIB::dskTotal.1 = INTEGER: 711016128
UCD-SNMP-MIB::dskAvail.1 = INTEGER: 67092156
UCD-SNMP-MIB::dskUsed.1 = INTEGER: 607223936
UCD-SNMP-MIB::dskPercent.1 = INTEGER: 90
```

Below is Storage Information. The unit size of physical memory and directory are 1KB(Kbytes), 4KB(Kbytes) respectively.

```
-----Storage Information-----
HOST-RESOURCES-MIB::hrStorageDescr.1 = STRING: Physical memory
HOST-RESOURCES-MIB::hrStorageSize.1 = INTEGER: 96788
HOST-RESOURCES-MIB::hrStorageUsed.1 = INTEGER: 36908
The RAM memory size (96788x 1K = 99119012 Bytes) and the size in use (36908x 1K = 37793792 Bytes) are displayed.
HOST-RESOURCES-MIB::hrStorageDescr.31 = STRING: /
HOST-RESOURCES-MIB::hrStorageSize.31 = INTEGER: 177754036
HOST-RESOURCES-MIB::hrStorageUsed.31 = INTEGER: 151800863
The size of the / directory (177754036x 4K = 711016144Kbytes), the size in use (151800863x 4K = 621776334848Kbytes) are displayed.
HOST-RESOURCES-MIB::hrStorageDescr.36 = STRING: /mnt/logdb
HOST-RESOURCES-MIB::hrStorageSize.36 = INTEGER: 1024
HOST-RESOURCES-MIB::hrStorageUsed.36 = INTEGER: 209
The size of the /mnt/mmc (SD Card) directory (1024x4K = 4096Kbytes) and the size in use (209x4K = 836Kbytes) are displayed.
```

CPU Load Information is shown below.

```
-----CPU Load Information-----
UCD-SNMP-MIB::laLoad.1 = STRING: 0.00
UCD-SNMP-MIB::laLoad.2 = STRING: 0.09
UCD-SNMP-MIB::laLoad.3 = STRING: 0.06
LaLoad.1 represents the average load for one minute, laLoad.2 represents the average load for 5 minutes, and laLoad.3 represents the average load for 15 minutes. In other words, it shows how many processes are running on average per CPU during that time. For example, laLoad.1 is 1.50, which shows that on average, one process is in the Active state and 0.5 processes are in the Standby state. A higher value means a more overloaded state.
```

Network Interface Information is shown below.

```
-----Network Interface Information-----
IF-MIB::ifSpeed.1 = Gauge32: 10000000
IF-MIB::ifPhysAddress.1 = STRING:
IF-MIB::ifInOctets.1 = Counter32: 0
IF-MIB::ifOutOctets.1 = Counter32: 0
IF-MIB::ifName.1 = STRING: lo
IF-MIB::ifSpeed.2 = Gauge32: 100000000
```

```
IF-MIB::ifPhysAddress.2 = STRING: 0:9:18:70:9b:e0
IF-MIB::ifInOctets.2 = Counter32: 23640565
IF-MIB::ifOutOctets.2 = Counter32: 1294399
IF-MIB::ifName.2 = STRING: eth0
IF-MIB::ifSpeed.2 = Gauge32: 100000000 represents the physical speed (100Mbps) of
the network. MAC address (0: 9: 18: 70: 9b: e0), input traffic (3237762 bytes) and
output traffic (135629515bytes) are displayed.
```

Memory Information is shown below.

```
-----Memory Information-----
UCD-SNMP-MIB::memTotalReal.0 = INTEGER: 96788 kB
UCD-SNMP-MIB::memAvailReal.0 = INTEGER: 61164 kB
The total memory (96788 kB) and remaining memory (61164 kB) are displayed.

-----Test End-----
```

SNMP Test

Hanwha Techwin SNMP MIB allows you to set up information such as systems, events, and data storage devices.

For OID information of each of the Hanwha Techwin devices, please refer to "Chapter MIB Hierarchy MIB Hierarchy"(Page 3).

SNMP commands only work with OID values, not object names. Also, when requesting the SNMP command `snmpget`, it is executed with `.0` at the end of the OID.

snmpwalk Command

- SNMP v1: `snmpwalk -v 1 -c public 192.168.1.100 enterprises.36849`
- SNMP v2c: `snmpwalk -v 2c -c public 192.168.1.100 enterprises.36849`

Tip

Public is the read community name set in the device web viewer.

- SNMP v3: `snmpwalk -v 3 -u admin -l authNoPriv -a MD5 -A admin4321 192.168.1.100 enterprises.36849`

Note

To use SNMP version 3, you must set the connection mode in the device web viewer to HTTPS secure connection mode.

The default ID and password for SNMP version 3 are admin and admin4321. The password can be set from the SNMP Settings page of the Device Web Viewer, and must be at least 8 characters long.

snmpget Command

- SNMP v1: `snmpget -v 1 -c public 192.168.1.100 enterprises.36849.1.2.1.1.0`
- SNMP v2c: `snmpget -v 2c -c public 192.168.1.100 enterprises.36849.1.2.1.1.0`

Tip

Public is the name of read community set in the device web viewer

- SNMP v3: `snmpget -v 3 -u admin -l authNoPriv -a MD5 -A admin4321 192.168.1.100 enterprises.36849.1.2.1.1.0`

<Result value> SNMPv2-SMI::enterprises.36849.1.2.1.1.0 = STRING: "SNB-1001"

snmpset Command

- SNMP v1: `snmpset -v 1 -c public 192.168.1.100 enterprises.36849.1.2.1.2.1.2.0 s "2011-10-30 11:40:31"`
- SNMP v2c : `snmpset -v 2c -c write 192.168.1.100 enterprises.36849.1.2.1.2.1.2.0 s "2011-10-30 11:40:31"`

Tip

Public is the read community name set in the device web viewer.

- SNMP v3: `snmpset -v 3 -u admin -l authNoPriv -a MD5 -A admin4321 192.168.1.100 enterprises.36849.1.2.1.2.1.2.0 s "2011-10-30 11:40:31"`
<Result value> SNMPv2-SMI::enterprises.36849.1.2.1.2.1.2.0 = STRING: "2011-10-30 11:40:31"